



COMMONWEALTH OF VIRGINIA

Department of Emergency Management

9711 Farrar Court, Suite 200, North Chesterfield, Virginia 23236
TEL 804.267.7600 TDD 804.674.2417 FAX 804.272.2046

CURTIS C. BROWN
State Coordinator of
Emergency Management

ERIN SUTTON
Chief Deputy State Coordinator
of Emergency Management

E-911 Border Response Workgroup Session #5 March 24, 2021 - 11:00 am to 1:00 pm Virtual Meeting

1. Call Meeting of the Workgroup to Order.....Deputy Secretary Shawn Talmadge, Chair
2. Welcome and Opening Remarks
 - Delegate David Reid and/or Delegate Roslyn Tyler
3. Update on Workgroup's Report.....Deputy State Coordinator Dorothy A. Spears-Dean
4. Wireless Location Accuracy.....NGS Bureau Staff
5. Next Steps.....Deputy State Coordinator Dorothy A. Spears-Dean
6. Adjourn.....Deputy Secretary Shawn Talmadge



Virginia Department of
Emergency Management

E-911 Border Response Workgroup

Session #5: March 24, 2021

Agenda

- Call meeting to order
- Welcome and opening remarks
- Workgroup report
- Wireless call routing and location accuracy
- Next steps
- Adjourn





Virginia Department of
Emergency Management

Call Meeting to Order



Virginia Department of
Emergency Management

Welcome and Opening Remarks



Virginia Department of
Emergency Management

Workgroup Report

Finding #1

Virginia residents need visibility into local operations and the statewide 9-1-1 ecosystem to understand current gaps in order to advocate for positive change.



Finding #2

Statewide 9-1-1 planning efforts must be holistic and include stakeholders and disciplines that are representational of the residents served to maximize problem solving, establish strong relationships, and build trust with all Virginia resident groups.



Finding #3

To improve upon 9-1-1 wireless location accuracy, the carrier community must be engaged in stakeholder discussions and involved in the remediation process to have confidence in the accuracy of data provided by carriers.



Finding #4

Telecommunicators must have culturally responsive scripts to build trust with 9-1-1 callers.



Finding #5

In order to provide effective 9-1-1 call handling, telecommunicators must possess personal and professional maturity to handle complex issues, understand applicable technologies, and have knowledge of the geographic area served by the local PSAP.



Finding #6

Telecommunicators need to be able to relate to diverse resident populations (e.g. – culture, language, sex, sexual orientation, generational).



Finding #7

PSAP managers must recruit a diverse work force that is representation of the communities served by their local PSAPs. A method to monitor and evaluate this diversity is critical, as well as a means to measure progress on closing identified gaps.



Finding #8

There is a widespread perception among Virginia residents that telecommunicators have all the knowledge, situational information, and resources needed to do their jobs effectively. Residents do not realize that for some telecommunicators there are training and resource gaps. Oversight agencies often expect telecommunicators to carry out non-9-1-1 operational related tasks.



Finding #9

All emergencies and responses to emergencies start with a 9-1-1 call. A successful emergency response outcome begins with the telecommunicator. Virginia PSAPs process most 9-1-1 calls effectively, but when the processing of a 9-1-1 call is compromised, there is the potential for significant negative outcomes.



Finding #10

Virginia PSAPs should be able to locate all 9-1-1 callers.



Finding #11

DCJS Basic Dispatcher training, by itself, is not sufficient. Virginia telecommunicators require training on additional topics, and levels of training, that supports public safety disciplines other than law enforcement. This training should include procedural safeguards.



Finding #12

Virginia state leadership needs to invest in the 9-1-1 industry to avoid having experienced telecommunicators leave PSAP employment. The focus of this investment must be on reclassification, recruitment, and retention.



Finding #13

A 9-1-1 caller is in crisis when seeking help and may not know where they are. To help the callers orient themselves, water signage and markers with QR codes may be helpful.



Finding #14

All 9-1-1 call systems and processes should be interoperable. For example, if PSAPs could see each other's CAD systems, telecommunicators and responding agencies could share situational awareness related to events at county and state borders.



Recommendation #1

- Cross Border 9-1-1 Call Processing Best Practices
- The NGS Bureau will produce a Cross Border 9-1-1 Call Processing Best Practice with the assistance of Bureau interns. The report will leverage information presented by 9-1-1 professionals in the National Capitol Region (NCR) and Southwest Virginia. The Workgroup will meet on August 24, 2021 to review and accept the best practice. Board members will review and vote on this document during their September 9, 2021 meeting.



Recommendation #2

- Wireless Location Accuracy Improvement Project
- The NGS Bureau will develop a project plan to improve wireless location accuracy in Virginia. This project will involve the carrier community and focus on improving the routing of 9-1-1 calls based on the increased accuracy of caller location data. The Workgroup will meet on April 20, 2021 to review and accept the project plan. Board members will review and vote on this document during their May 13, 2021 meeting.



Recommendation #3

- NG9-1-1 Telecommunicator Reclassification, Recruitment, and Retentions Initiative
- The NGS Bureau will work with the Board's Regional Advisory Council (RAC) to address comprehensively the reclassification recruitment, and retention of the NG9-1-1 telecommunicator. The Workgroup will meet on June 15, 2021 to review and provide input on the project plan.



Recommendation #4

- NG9-1-1 Leadership Commission
- Establish by July 2022 a NG9-1-1 Leadership Commission to facilitate the transition to NG9-1-1 statewide and identify ways to increase the reliability and accuracy of emergency services to all Virginia residents by utilizing this new infrastructure.





Virginia Department of
Emergency Management

Wireless Call Routing E911 Border Response Workgroup March 24, 2021

Deployment Phases

- **Phase 0**

Characterized by the wireless being delivered to the PSAP on a 10-digit telephone line. There is **no location information or callback number**.

- **Phase I**

Delivers the call to the PSAP based on the cell site and sector receiving the call and **provides the address of the cell site and call back number for the caller**.

- **Phase II**

Delivered to the PSAP using the same method as Phase I, but the **actual location of the caller is provided as a longitude and latitude**. However, the longitude and latitude may deviate from the caller's actual location by a margin of error.



February 2021 – Virginia 9-1-1 Calls: Class of Service Report

- 246,410 total statewide 9-1-1 calls
- 192,739 total statewide wireless calls (78.2% wireless)
 - Phase 0 - 99 (0.05%)
 - No location data or callback number
 - Phase I – 42,560 (22.1%)
 - Cell site and cell sector along with callback number for the caller
 - Phase II – 150,080 (78.2%)
 - Lat/long provided along with callback number for the caller. However, confidence in the lat/long values can vary. Data on confidence is available, but is very time intensive to analyze.



What the PSAP May See

- Just because it is Phase II doesn't mean it is accurate. Below is an example of an example wireless call that is Phase II (WPH2), but it has a very large confidence factor (COV) which is in meters.
- This call has a 95% confidence of being within 10,502 meters (6 miles) of the lat/long provided. Not helpful...
- COF can either be very low (5-10 meters) or very high (hundreds or thousands of meters).


```
540-588-9005 07/13 14:03:17 142
CAUTION: WIRELESS CALL
WIRELESS-VERIZON(XYP) WPH2
                220 EAST MAIN STREET

SALEM VA
(540) 511-8611 NW SECTOR DOWNT
OWN SALEM CELL220 3
LAT:+037.293187 LON:-080.054926
ELV: COF: 10502 COP:95.
MTN:540-511-8611 CPF:
                ESN:00594
```




What Callers Expect in an Emergency

- Using the percentages from February, let's look at an example emergency with five (5) callers who call 9-1-1 about an emergency located in PSAP B.
- They are all located in PSAP B (and expect their calls to go to PSAP B), but their calls are made via three (3) different wireless providers.

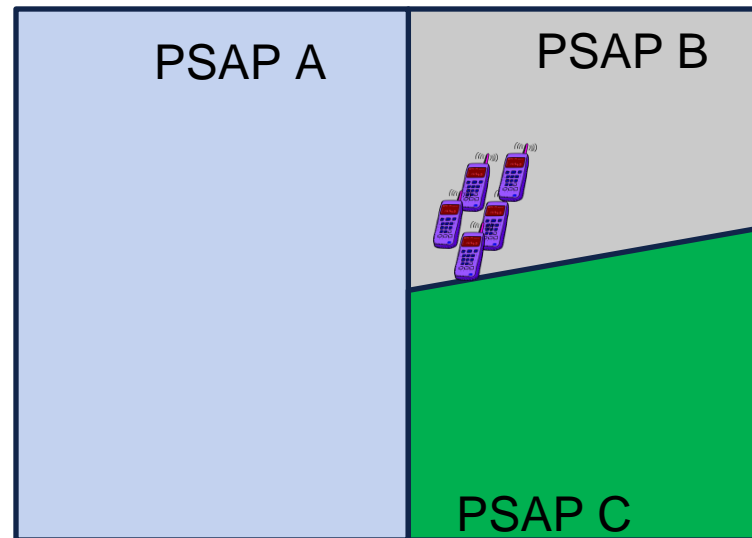


What Happens – Wireless Provider 1 Calls are Sent to PSAP A

- Two (2) of the callers have phones with Wireless Provider 1 that operate cell tower #1.
- The PSAPs and the provider determine that the SW sector for tower #1 covers a large part of PSAP A and small parts of PSAP B and C.

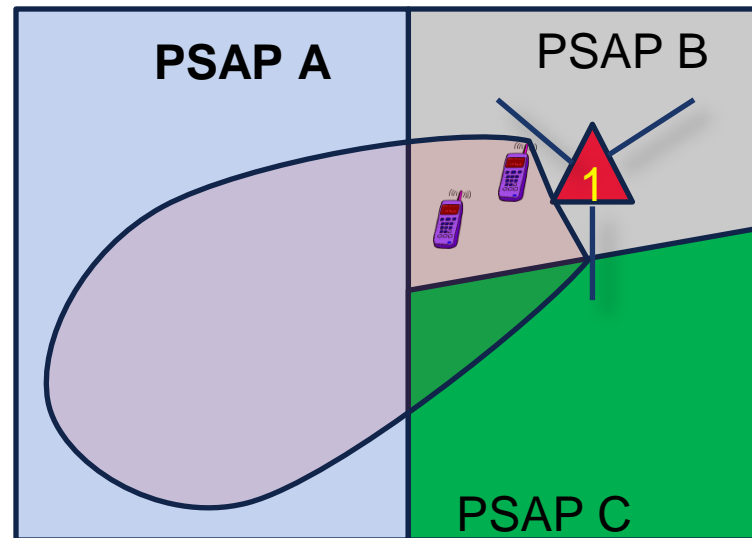


What Happens – Wireless Provider 2 Calls are Sent to PSAP B

- Two (2) of the callers have phones with Wireless Provider 2 that operate cell tower #2.
- The PSAPs and the provider have determined that the NE sector for tower #2 is primarily in PSAP B so ALL calls within that sector go to PSAP B.

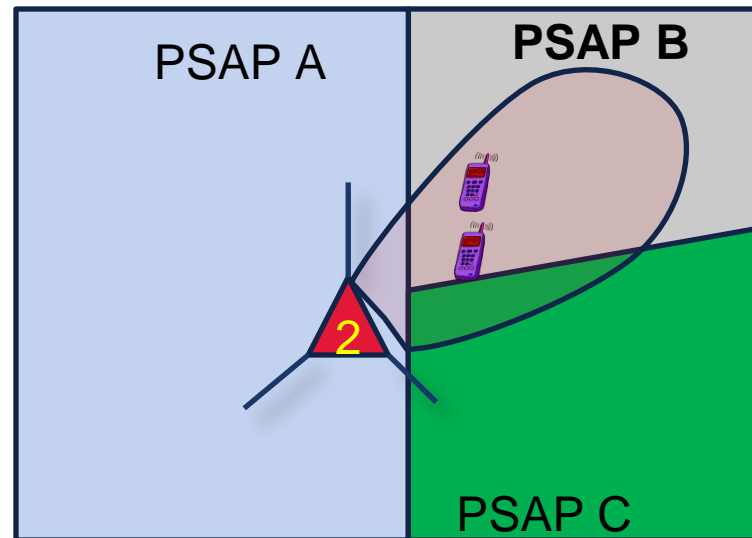

What Happens – Wireless Provider 3 Calls are Sent to PSAP C

- The last caller has a phone with Wireless Provider 3 that operates cell tower #3.
- This cell tower is omnidirectional so all calls hitting this tower go to the same place (in this case PSAP C).

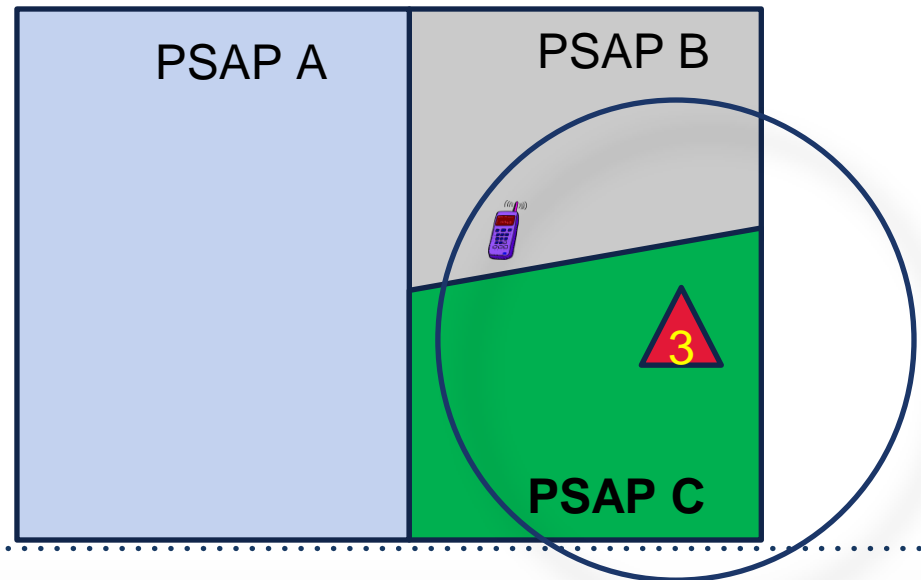

Impact to 9-1-1 Today

What do we see across Virginia?

- Telecommunicators often see **significant volumes of calls that are either Phase I or Phase II with low-confidence or questionable location data** (42,000 calls last month in Virginia were Phase I)
- In life/death situations, it is **essential for PSAPs to have access to available resources that can help to refine the caller's location.**
- **Seconds matter... Minutes are heart wrenching for all involved...**
Providing PSAPs with timely and accurate information can eliminate seconds or minutes from the call flow resulting lives saved.
- **Virginia Successes:** As presented in previous calls, examples of mitigation measures include implementation of projects such as **GIS data sharing, CAD2CAD, RapidSOS**, etc).



What is Required for Improved Call Routing and Call Processing?

Accurate Caller Location (Wireless Carrier Responsibility)

The ACTUAL location of the caller is needed (with a high degree of confidence) and that location must be able to be communicated from the handset to the various servers and companies who are involved in providing that location to the PSAP.

Accurate and Complete PSAP Boundaries (PSAP / VDEM Responsibility)


When high confidence location data for the caller is available, accurate and complete PSAP boundaries can be used to assist the PSAP in more effectively processing the call.



Status of PSAP Boundaries in Virginia

[Link to NG9-1-1 Dashboard](#)

- Over the past year, each PSAP has met with each of their neighbors to develop a GIS layer depicting their agreed upon PSAP boundaries.
- Most of the boundaries are complete, and the final handful of boundaries are being finalized.

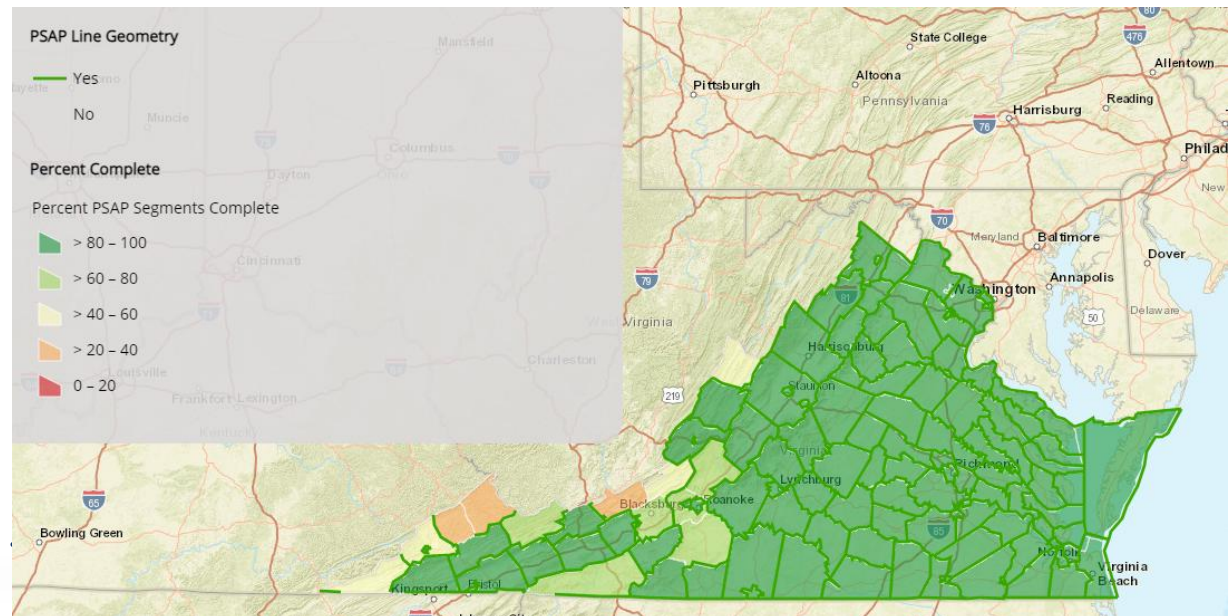

Emerging Solutions that can Greatly Assist with 9-1-1 Call Processing

Device Based Hybrid Location

Google has enabled features in 99% of Android devices and Apple has enabled features with iPhone 6+. When a caller calls 9-1-1, their phone: Automatically turns on GPS, Bluetooth, and Wi-Fi and sends that location information to Google or Apple

Google and Apple then are able to push that data to third-party 9-1-1 integrators who develop tools and capabilities for use by the PSAPs

Next Generation 9-1-1

Moves 9-1-1 network to an IP-based system.

Enables GIS data to be used to route 9-1-1 calls (wireless, wireline, VOIP, text, etc) based on the geospatial routing.

Increases the amount of data available to PSAPs including Additional Data Repositories that provide additional data to the PSAPs about the caller, the location, or the incident.



Short and Mid-Term Opportunities

Examples of Low Hanging Fruit

Rapid SOS

Provides PSAPs the ability to access the related device-based hybrid location and other additional data in the PSAP. Does NOT solve the routing problem, but **does provide the device based hybrid location to the PSAP**, so the PSAP can more easily visualize the location based on the information that the handset communicates to Apple or Google.

T-Mobile – Location Based Routing

Uses the device-based hybrid location and PSAP Boundaries to provide recommended routing of the 9-1-1 call, essentially bypassing the challenges faced with cell sectors / routing sheets. **T-Mobile is looking to implement this nationwide** and is designed to work with both legacy 9-1-1 providers and NG9-1-1 providers, and it was recently presented to DC area PSAPs. PSAPs and NGS staff are performing due-diligence to gather more information.

Additional Consumer and Industry Driven Innovation

Tools and resources that leverage **handset language, crash detection, fall detection, and sharing critical health data**. Innovative approaches will continue to increase with the deployment of 5G, additional sensors, and IP-connected devices.





Virginia Department of
Emergency Management

Questions / Discussion?

In Conclusion

- Next steps
- Adjourn



1. Executive Summary

The General Assembly formed the E-911 Border Response Workgroup (the “Workgroup”) to assess the deficiencies related to the timely routing of 911 calls to the appropriate public-safety answering point (PSAP) across either state or county borders. The Virginia Secretary of Public Safety and Homeland Security (the “Secretary”) appointed individuals to the Workgroup representing the following stakeholder groups:

- Virginia Office of Secretary of Public Safety and Homeland Security
- Virginia General Assembly
- Virginia Residents
- Virginia 9-1-1 Services Board
- 9-1-1/PSAP Community
- Emergency Management Community

The Workgroup’s objective was to complete a report by April 1, 2021 that contains recommendations to improve the routing and processing of 9-1-1 calls to the appropriate PSAP across state borders and/or county boundaries based on lessons learned. To develop this report, the Workgroup met virtually and collaborated with the Virginia Department of Emergency Management’s (VDEM’s) 9-1-1 and Geospatial Services (NGS) Bureau staff to collect information on problems with the current system and processes; review mitigation solutions already implemented by localities and citizen groups; and, determine best practices. The Workgroup investigated the five functional areas related to 9-1-1 systems and processes:

- Governance
- Technology/NG9-1-1 Deployment
- Equipment, Operations and Mitigation Strategies
- 9-1-1 Personnel and Training
- Funding and Compensation

The Workgroup had an extensive list of Findings and the following recommendations:

- Develop a cross border 9-1-1 call processing best practice
- Improve wireless 9-1-1 location accuracy
- Address telecommunicator reclassification, recruitment, and retention
- Form a NG9-1-1 Leadership Commission

2. Introduction

Problem Statement

The General Assembly formed the E-911 Border Response Workgroup (the “Workgroup”) to assess the deficiencies related to the timely routing of 911 calls to the appropriate public-safety answering point (PSAP) across either state or county borders. At a minimum, the workgroup had the following tasks to complete:

- Work with stakeholders to collect information on problems with the current system and processes
- Review mitigation solutions already implemented by localities and citizen groups
- Determine best practices
- Provide inputs and recommendations on technology, training, and compensation that would be necessary to address the identified deficiencies

Workgroup Membership

The Virginia Secretary of Public Safety and Homeland Security (the “Secretary”) appointed the following individuals, representing a variety of stakeholder groups, to the Workgroup:

- **Deputy Secretary Shawn Talmadge, Chair**
- **Delegate David Reid, General Assembly**
- **Delegate Tyler, General Assembly**
- **Pastor Michelle Thomas, citizen representative**
- **Sherry Herzing, citizen representative**
- **Christian Yohannes, youth citizen representative**
- **Grant Sheets, youth citizen representative**
- **Curtis Brown, 9-1-1 Services Board**
- **Devon Clary, PSAP Representative, Brunswick County Sheriff’s Office**
- **Theresa Kingsley-Varble, PSAP Representative, Washington County**
- **Eddie Reyes, PSAP Representative, Prince William County Government**
- **Sonny Saxton, PSAP Representative, Charlottesville-UVA-Albemarle County ECC**
- **Patty Turner, PSAP Representative, Loudoun County Fire and Rescue**
- **Melissa Meador, Emergency Management Representative, Greene County**
- **Elizabeth Vargas-Jackson, M.D., COVID 19 Health Equity Group**
- **Dorothy Spears-Dean, Ph.D., Deputy State Coordinator, VDEM**

3. Objectives, Scope, and Method

Objective

The objective for the Workgroup is to provide a report to the Secretary. This report should contain recommendations to address the conditions identified in the Problem Statement. The

Secretary shall provide the Workgroup's Report to the Governor and General Assembly no later than April 1, 2021.

Scope

The Workgroup collaborated with stakeholders and VDEM's 9-1-1 and Geospatial Services (NGS) Bureau staff to collect information on problems with the current system and processes; review mitigation solutions already implemented by localities and citizen groups; and, determine best practices.

Method

The Workgroup met virtually on an agreed upon schedule to focus on 9-1-1 systems and processes key functional areas to develop recommendations that addressed identified gaps within the 9-1-1 ecosystem, unmet needs within PSAPs, and areas requiring mitigation and/or improvement. Members of the Workgroup discussed these functional areas as discrete topics in separate meetings to ensure they achieved adequate depth of these key functional areas.

4. Background

The graphic below identifies the five functional areas related to 9-1-1 systems and processes recommended by NGS Bureau staff for the Workgroup to investigate:



- **Governance**
- **Technology/NG9-1-1 Deployment**
- **Equipment, Operations & Mitigation Strategies**
- **9-1-1 Personnel & Training**
- **Funding & Compensation**

9-1-1 Systems and Processes Functional Areas

The Workgroup had less than 10 weeks to complete its report and relied on NGS Bureau staff to coordinate presentations to provide members with substantive information on the above 9-1-1 systems and processes functional areas. Presentations provided by NGS Bureau staff and 9-1-1 professionals provided an overview of 9-1-1 call processing in Virginia to enable Workgroup members to identify where problems may exist with related current systems and processes.

Governance

A PSAP is the entity responsible for receiving and processing 9-1-1 calls according to its governing body's operational policies and must adhere to any applicable federal or state mandates. A primary PSAP is a facility to which 9-1-1 calls are routed directly, and will be staffed 365 days per year, 24 hours a day, 7 days a week. A secondary PSAP has 9-1-1 calls transferred to them from a primary PSAP and cannot receive 9-1-1 calls directly.

The governance of a PSAP must be defined by the jurisdiction(s) served by the PSAP. While there is no, one best governance structure, it must be established in writing to ensure the governance structure is known by all. PSAPs may be governed by any government entity such as a law enforcement, fire, EMS, emergency management agency, a sheriff's office, or a board/authority. A PSAP may also be a stand-alone agency within a local government, but regardless of the governance structure, one person or entity must be responsible for the

operations of the PSAP. Below is a breakdown of the PSAP organizational models of Virginia across the states:

- Sheriff's Office - 59
- Standalone Department - 24
- Police Department - 23
- Regional Partnership / Commission / Authority - 11
- Emergency Management - 4
- Fire Department - 3

Technology

The Commonwealth's 9-1-1 system is dependent on legacy architecture built in the 1970s and based on decades-old circuit switched technology originally built to process landline calls. A caller's location from a landline phone is determined through the Automatic Location Identification (ALI) function. In the mid-1990s, with the proliferation of wireless technologies, Virginia's 9-1-1 system faced a new challenge – receiving 9-1-1 calls from cell phones and identifying the location of the caller.

Out of the approximate four million calls made to Virginia PSAPs, around 80 percent are made from wireless devices. However, wireless calls make the emergency response process more difficult. Cell phones are not tied down to any one location, so telecommunications don't know your exact whereabouts when you call from a mobile device. Instead, the call goes to the PSAP associated with the cell tower your phone is using. This can result in the routing of a 9-1-1 call to the wrong PSAP, particularly if a cell tower is close to a PSAP boundary.

The Commonwealth is moving forward to evolve 9-1-1 and ensure quality service to its citizens and visitors. To accomplish this, the Board has begun moving to a Next Generation 9-1-1 (NG9-1-1) system. NG9-1-1 is a modern internet protocol (IP) network, that has the ability to deliver calls to the appropriate PSAP faster, transfer 9-1-1 calls and associated data anywhere needed, interconnect with other public safety systems and databases, and in the future, securely receive multimedia communications like text, photos and videos. As service providers begin abandoning the legacy circuit-switched technology, the urgency to update the 9-1-1 infrastructure to NG9-1-1 increases tremendously. Actions to transform outdated system into a digital network that is faster, more efficient, and has greater capabilities to serve Virginia residents is currently underway.

Equipment, Operations, and Mitigation Strategies

PSAP service areas must be established to ensure that 9-1-1 calls made from any address or location are routed to the correct PSAP. The routing of wireless 9-1-1 calls may initially be

based on the cellular sector receiving the call. The routing of wireline and VoIP calls to 9-1-1 will be based on the registered address for that telephone. In either case, 9-1-1 calls for service are usually routed through local exchange carriers' (LECs') selective routers to get to the appropriate PSAP. An Emergency Services IP network (ESInet) will replace this routing configuration utilizing selective routers with the deployment of NG9-1-1.

All PSAPs must install and maintain the following technical systems:

- 9-1-1 call handling equipment to receive and process 9-1-1 calls. PSAPs should establish a service and maintenance contract for the call handling equipment to ensure rapid response to system failures and routine, periodic preventive maintenance.
- A CAD system to receive and process public safety calls for service. PSAPs are encouraged to consider utilizing a shared CAD system with one or more other PSAPs. This shared services approach increases interoperability, situational awareness, and data shared between localities.
- A mapping display system to plot 9-1-1 calls. This equipment must have the capability to automatically plot the address or latitude and longitude (lat/long) of a 9-1-1 call on a map as well as capable of replotting the location information and update the map as the caller may be mobile. If a wireless 9-1-1 call is routed based on a cellular sector, the location of the tower and direction of the sector should also be plotted. The mapping display system may also accept and plot location and incident data from the CAD system. All data in the mapping display system should be updated on an established schedule that ensures accurate, up-to-date data.

Workgroup PSAP representatives and other 9-1-1 professionals presented on the following migration strategies and best practices:

- CAD2CAD
- No-Call Transfer Projects
- Northern VA Emergency Response System (NVERS)
- Available options to address carrier gaps with location accuracy
- Carrier/service provider outage notification strategies
- Regional workgroups
- One-button transfers for 9-1-1 direct or emergency 10-digit numbers to each adjacent locality's PSAP
- The telecommunicator should stay on the line until the connection is complete and all pertinent information, as determined by the PSAP, has been relayed
- Blind transfers (when the call is sent to another location and the initial call taker drops off before connection is complete and information relayed) of emergency calls should never occur

9-1-1 Professionals and Training

All personnel that dispatch for law enforcement are required to complete the Department of Criminal Justice Services (DCJS) Basic Telecommunicator program within the first two years of their employment ([§ 9.1-102.10](#)). PSAP management must identify in SOPs, General Orders, or Policies all other training that is required of their personnel. Other critical areas of telecommunication training recommended by the Board includes the following:

- NG9-1-1
- Wireless 9-1-1
- Text-to-9-1-1
- GIS
- Dispatch Training (Fire, Rescue and Law Enforcement)
- Critical Incident Stress Management (CISM)
- Technical Systems used by the PSAP (CHE, CAD, mapping, etc.)
- Continuing Education/In-service Training

The Board has accepted the following best practices previously published by NGS Bureau staff:

- 9-1-1 Addressing Operational and Administrative Best Practice
- 9-1-1 Call for Service Dispatching Best Practice
- Public Safety Call Processing Best Practice
- Wireless 9-1-1 Call Routing Optimization
- Optimal PSAP Staffing Structure Best Practice v1.1

Funding and Compensation

The Wireless E-911 Fund collects about \$60 million annually through pre- and post-paid 9-1-1 surcharges on Virginia residents' service bills. This funding is used to support Virginia's 9-1-1 Program. The entry-level pay range for Virginia telecommunicators is from \$26,185 to \$48,070.

5. Analysis

A qualitative analysis approach that employed individual interviews and groups discussions was used to develop the Findings and Recommendations contained in this report.

6. Findings

An amendment from the 2020 General Assembly Special Session directed the Secretary of Public Safety and Homeland Security to establish an E-911 Border Response Workgroup to make recommendations based on the guidance of the budget amendment related to Virginia's existing 9-1-1 system. The goal of the Workgroup is to improve the routing and processing of 9-1-1 calls to the appropriate PSAP across state borders and/or county boundaries based on lessons learned from experiences in order to prevent future tragedies. The Findings below are the basis for the Recommendations contained in the report:

1. Virginia residents need visibility into local operations and the statewide 9-1-1 ecosystem to understand current gaps in order to advocate for positive change.
2. Statewide 9-1-1 planning efforts must be holistic and include stakeholders and disciplines that are representational of the residents served to maximize problem solving, establish strong relationships, and build trust with all Virginia resident groups.
3. To improve upon 9-1-1 wireless location accuracy, the carrier community must be engaged in stakeholder discussions and involved in the remediation process to have confidence in the accuracy of data provided by carriers.
4. Telecommunicators must have culturally responsive scripts to build trust with 9-1-1 callers.
5. In order to provide effective 9-1-1 call handling, telecommunicators must possess personal and professional maturity to handle complex issues, understand applicable technologies, and have knowledge of the geographic area served by the local PSAP.
6. Telecommunicators need to be able to relate to diverse resident populations (e.g. – culture, language, sex, sexual orientation, generational).
7. PSAP managers must recruit a diverse work force that is representation of the communities served by their local PSAPs. A method to monitor and evaluate this diversity is critical, as well as a means to measure progress on closing identified gaps.
8. There is a widespread perception among Virginia residents that telecommunicators have all the knowledge, situational information, and resources needed to do their jobs effectively. Residents do not realize that for some telecommunicators there are training and resource gaps. Oversight agencies often expect telecommunicators to carry out non-9-1-1 operational related tasks.
9. All emergencies and responses to emergencies start with a 9-1-1 call. A successful emergency response outcome begins with the telecommunicator. Virginia PSAPs

process most 9-1-1 calls effectively, but when the processing of a 9-1-1 call is compromised, there is the potential for significant negative outcomes.

10. Virginia PSAPs should be able to locate all 9-1-1 callers.
11. DCJS Basic Dispatcher training, by itself, is not sufficient. Virginia telecommunicators require training on additional topics, and levels of training, that supports public safety disciplines other than law enforcement. This training should include procedural safeguards.
12. Virginia state leadership needs to invest in the 9-1-1 industry to avoid having experienced telecommunicators leave PSAP employment. The focus of this investment must be on reclassification, recruitment, and retention.
13. A 9-1-1 caller is in crisis when seeking help and may not know where they are. To help the callers orient themselves, water signage and markers with QR codes may be helpful.
14. All 9-1-1 call systems and processes should be interoperable. For example, if PSAPs could see each other's CAD systems, telecommunicators and responding agencies could share situational awareness related to events at county and state borders.

7. Recommendations

1. Cross Border 9-1-1 Call Processing Best Practices (September 2021)

The NGS Bureau will produce a Cross Border 9-1-1 Call Processing Best Practice with the assistance of Bureau interns. The report will leverage information presented by 9-1-1 professionals in the National Capitol Region (NCR) and Southwest Virginia. The Workgroup will meet on August 24, 2021 to review and accept the best practice. Board members will review and vote on this document during their September 9, 2021 meeting.

2. Wireless Location Accuracy Improvement Project (December 2021)

The NGS Bureau will develop a project plan to improve wireless location accuracy in Virginia. This project will involve the carrier community and focus on improving the routing of 9-1-1 calls based on the increased accuracy of caller location data. The Workgroup will meet on April 20, 2021 to review and accept the project plan. Board members will review and vote on this document during their May 13, 2021 meeting.

3. NG9-1-1 Telecommunicator Reclassification, Recruitment, and Retention Initiative (Dec 2021)

The NGS Bureau will work with the Board's Regional Advisory Council (RAC) to address comprehensively the reclassification recruitment, and retention of the NG9-1-1 telecommunicator. The Workgroup will meet on June 15, 2021 to review and provide input on the project plan.

4. Long-term: NG9-1-1 Leadership Commission (July 2022)

Establish a NG9-1-1 Leadership Commission to facilitate the transition to NG9-1-1 statewide and identify ways to increase the reliability and accuracy of emergency services to all Virginia residents by utilizing this new infrastructure.